





LKT 130

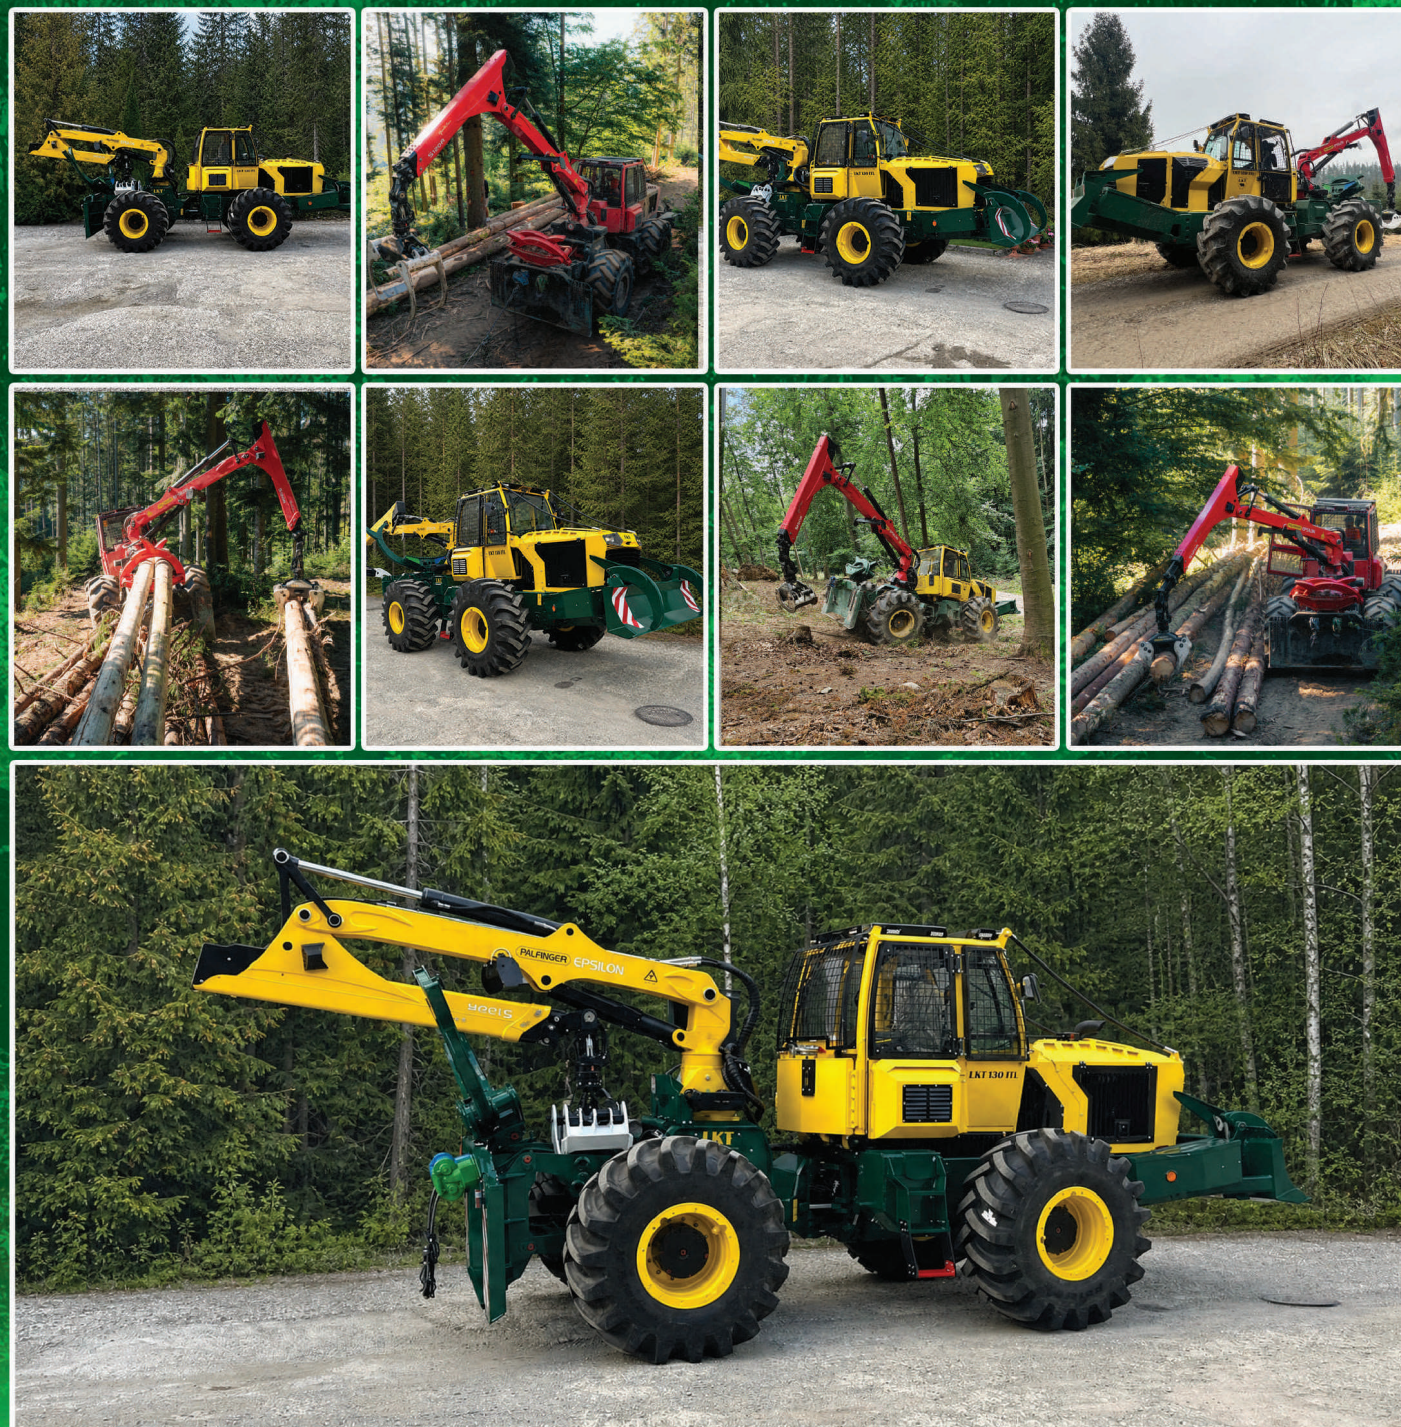


LKT s.r.o.
 Oravická 1965/62
 028 01 Trstená
lkt@lkt.sk
lktholding.sk

Dealer:

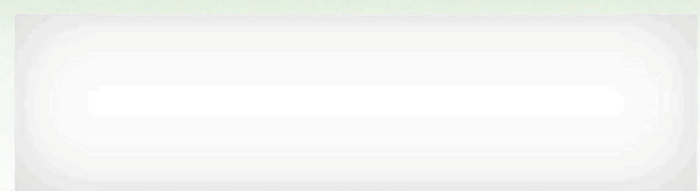

LKT130 Technische Parametern

Motor:
- CUMMINS B4.5, EU Stage V - Leistung: 129 kW (173PS) bei 2500 U/min. - Max. Drehmoment: 780 Nm bei 1500 U/min. - Dieselmotor: 4,5 l, 4-Zylinder, 4-Takt mit Turbolader
Fahrantrieb:
- Hydrodynamisch, lastschaltbar, 12-Vorwärts- und 8-Rückwärtsgänge, hydrodynamischer Konverterblock - Zweistufiges Verteilergetriebe, Fahrtstufen Gelände / Straße
Achsen:
- Planetengetriebe-Starrachsen, vorne und hinten am Rahmen montiert - Elektrohydraulisch gesteuerte Differentialsperre vorne und hinten
Bremse:
2-Kreis-Bremse, Scheibenbremse im Ölbad - Scheibenbremsen, gesteuert durch Bremszylinder mit elektrohydraulischer Feststellbremse (federbetätigt)
Lenkung:
- Vollhydraulische Servolenkung mit 2 Hydraulikzylindern 43° Lenkwinkel
Tankinhalt:
Diesel: 140 l / AdBlue: 17 l / Hydrauliköl: 110 l
Hydrauliksystem:
- Hydraulikantriebspumpe Danfoss mit Lastsensor - Durchfluss 120 l/min bei 1600 U und Hydraulikdruck bis zu 300 bar
Kabine:
- Komfortable, nach ROPS, FOPS und OPS geprüfte Sicherheitskabine - HVAC: Heizung, Belüftung und Vorbereitung für Klimaanlage - Sitz: komfortabel, beheizbar, mit Luftfederung und mechanischer Drehfunktion
Instrumente und elektrische Anlage:
3,5-Zoll Display - Spannung: 24V - Lichtmaschine: 70A/28V - Batterien: 12V/50Ah - 2 Stück - Anlasser: 4 kW/24V
Winde:
Serie: 2x80 kN, Doppeltrommelwinde, elektrohydraulische Steuerung Seildurchmesser/Seillänge: 12mm/90m oder 13mm/75m
Reifen:
Serie: 23,1-26

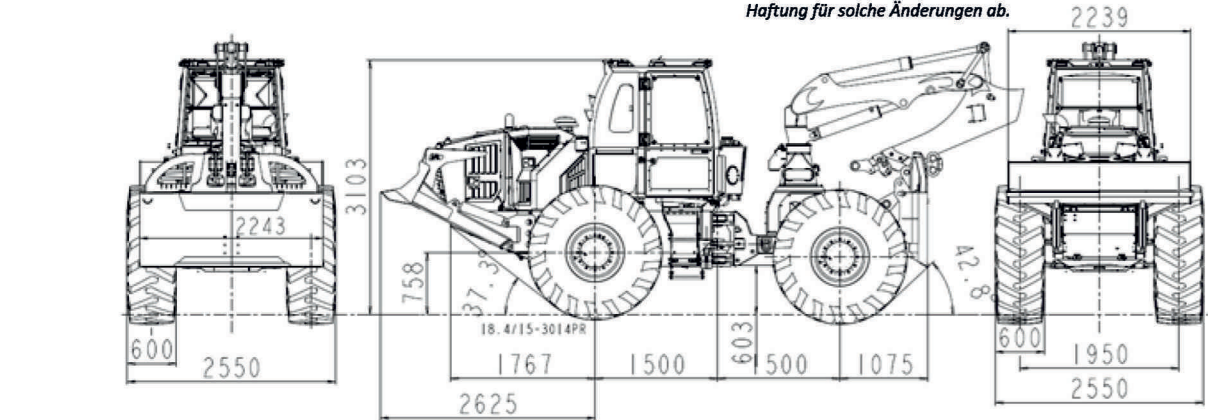


Standardaustattung:
- Frontschild, 2239 mm breit - Heckschild hydraulisch kippbar, hoher Sockel, mit sphärischen Führungsrollen - Mittegelenk: Schwenken der Rahmen durch Axiallager, hydraulischer Verriegelung
Gewicht:
10.500 (Schlepper) / 14.500 kg (Kranschlepper)
LKT 130 Optionale Ausstattung

Winde:
2x100 kN, Doppeltrommel, elektrohydraulische Steuerung Seildurchmesser/Länge: 12 mm/90 m oder 13 mm/75 m 2x120 kN, Doppeltrommel, elektrohydraulische Steuerung Seildurchmesser/Länge: 12 mm/140 m oder 13 mm/120 m 2x135 kN, Doppeltrommel, elektrohydraulische Steuerung Seildurchmesser/Länge: 12 mm/130 m oder 13-14 mm/100 m 2x165 kN, Doppeltrommel, elektrohydraulische Steuerung Seildurchmesser/Länge: 12 mm/130 m oder 13-14 mm/100 m
Kran:
- Epsilon Palfinger M90 R80 mit Reichweite von 8,0 m - Epsilon Palfinger S110 R80 mit Reichweite von 8,0 m - Epsilon Palfinger S120 R80 mit Reichweite von 8,0 m - Epsilon Palfinger X130 R80 mit Reichweite von 8,0 m - Palfinger Greiferoptionen: FG 37, FG 43S, FG 31R
Reifen:
28L-26 / Ketten auf Anfrage erhältlich

LKT 130 Sonderausstattung:
- Klemmbank und Heckschildoptionen - Werkzeugkästen: 2 Stück seitlich am Frontschild - Frontgreifer für die Handhabung von baumstämmen - Fernbedienung: Start-Stopp-System, Fahrsteuerung der Maschine, Winde, Heckschild und Drosselregelung - Klimaanlage mit unabhängigem Kühler und Ventilator - Radio mit USB-Anschluss und 2 Lautsprechern - Schutzsitzbezug (LKT) - Schutzgitter für alle Kabinenfenster - Getönte Heck- und hintere Seitenfenster mit verstärktem Abriebschutz - Getönte Heck- und hintere Seitenfenster mit Durchschlagschutz bei Kettenschuss ISO21876 KASIGLAS - Lichttrampe an der Kabine – LED-Arbeitsscheinwerfer 4x2 Stück - Frontkamera und Rückkamera mit Monitor - Schnellkupplung für Anhänger 14 t - Elektrohydraulische Schnellkupplungen mit Heckauslass (für den Antrieb von Anbaugeräten, Antrieb und Bremsen des Anhängers) - Kraftstoffdurchflussmesser
Die in dieser Broschüre dargelegten Produkte und Spezifikationen können ohne vorherige Ankündigung geändert werden und LKTHolding, s.r.o. lehnt jegliche Haftung für solche Änderungen ab.

LKT130 Technical parameters

Engine:
- CUMMINS B4.5, EU Stage V - Power: 129 kW (173HP) at 2500 rpm - Max. torque: 780 Nm at 1500 rpm - Diesel engine: 4,5 l, 4-stroke with turbocharger, 4-cylinder
Transmission:
- Hydrodynamic, shifting under load, 12-forward and 8-reverse gears, hydrodynamic convertor blocking - Two-gears transfer case for work and travel speed
Axles:
- Planetary rigid axles mounted on front and rear frame - Front and rear differential locking electro-hydraulically operated
Brake:
2-circuit brake, disk brake running in an oil bath - disc operation brakes controlled by brake cylinders with electro-hydraulic parking brake (spring-loaded)
Steering:
- Articulated fully hydraulic servo steering with 2 hydraulic cylinders 43° steering angle
Tank capacity:
Diesel: 140 l / AdBlue: 17 l / Hydraulic oil: 110 l
Hydraulic system:
- Load sensing hydraulic work pump Danfoss - Flow rate 120 l/min at 1600 rpm and pressure up to 300 bar
Cabin:
- Comfort ROPS, FOPS, OPS tested safety cab - HVAC: Heating, Ventilation and preparation for Air Conditioning - Seat: comfort, heated, with air suspension and mechanical swivel
Instruments and Electric system:
3,5-inch screen colour display - Voltage: 24V - Alternator: 70A/28V - Batteries: 12V/50Ah - 2 pcs - Starter: 4 kW/24V
Winch:
Series: 2x80 kN, double drum winch, electro-hydraulic operation Rope diameter/length: 12mm/90m or 13mm/75m
Tyres:
Series: 23,1-26

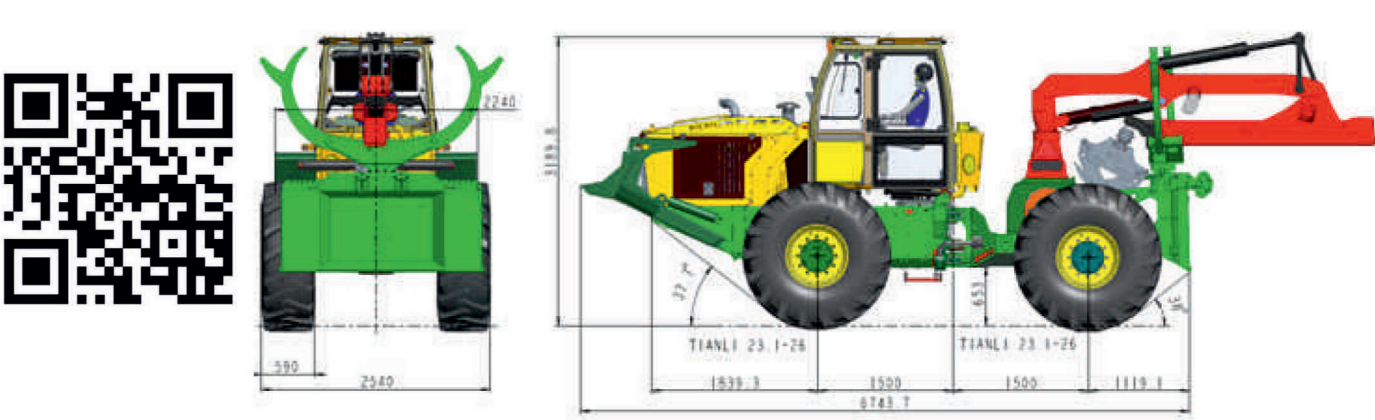

Standard equipment:
- Front blade, 2239 mm wide - Rear shield tiltable hydraulically operated, high pedestal, guiding rollers - Frames: pivoting of the frames through axial bearing, hydraulic lock
Weight:
10.500 kg (Skidder) / 14.500 kg (Skidder with crane)
LKT 130 Optional equipment
Winch:
2x100 kN, double drum winch, electro-hydraulic operation rope diameter/ length: 12mm/90m or 13mm/75m 2x120 kN, double drum winch, electro-hydraulic operation rope diameter/ length: 12mm/140m or 13 mm/120m 2x135 kN, double drum winch, electro-hydraulic operation rope diameter/ length: 12mm/130m or 13-14 mm/100m 2x165 kN, double drum winch, electro-hydraulic operation rope diameter/ length: 12mm/130m or 13-14 mm/100m
Crane:
- Epsilon Palfinger M90 R80 with a reach of 8,0 m - Epsilon Palfinger S110 R80 with a reach of 8,0 m - Epsilon Palfinger S120 R80 with a reach of 8,0 m - Epsilon Palfinger X130 R80 with a reach of 8,0 m - Palfinger grabs options: FG 37, FG 43S, FG 31R
Tyres:
28L-26 / chains available on request

LKT130 Other optional equipment:
- Clambunk and rear shield options - Toolboxes: on the front blade - storage boxes 2 pcs - Front grapple teeth for logs manipulation - Remote control: start - stop system, travel control of machine, winch, rear shield and throttle regulation - Air-condition with independent cooler and ventilator - Radio with USB port and 2 speakers - Protective seat cover (LKT) - Cabin protection with protective iron grid - Shaded rear and rear side windows with increased abrasion resistance - Shaded rear and rear side windows, shatterproof ISO21876 KASIGLAS - Side working LED lights on the cab 4x2 pcs - Front camera and rear camera with monitor - Coupler for trailer 14 t - Electro-hydraulic quick couplings with rear outlet (for drive of attachments, drive and braking of trailer) - Fuel flow meter - Hydraulic oils – BIO oil instead of mineral oil

The products and specifications set forth in this brochure are subject to change without notice and LKT Holding, s.r.o. disclaims any and all liability for such changes.